



Product Descriptions		
Submersible Hydraulic & Electric Pumps - 125 standard models.		
Sections 3 and 4	SRS Crisafulli has engineered and built submersible hydraulic and electric pumps for some 40 years. All its pumps are built to written specifications and engineered designs. 53 submersible hydraulic and 72 submersible electric standard pump models and are offered in 11 product groups. SRS Crisafulli pumps are built rugged for long-term reliable service in a wide range of agricultural, industrial, contractor, government, and municipal applications.	
Section 3	Submersible Electric Pumps - 72 standard models - 6 product groups	Page
	Performance Summary - All Models	3-1
	H-Series 1750 RPM - Standard Models Standard Options - 5 models	3-2
	J-Series 1150 RPM - Standard Models Standard Options - 21 models	3-3
	J-Series 1750 RPM - Standard Models Standard Options - 21 models	3-4
	S-Series 1150 RPM - Standard Models Standard Options - 3 models	3-5
	S-Series 1750 RPM - Standard Models Standard Options - 16 models	3-6
	S-Series 3450 RPM - Standard Models Standard Options - 6 models	3-7
Section 4	Submersible Hydraulic Pumps - 53 standard models - 5 product groups	
	Performance Summary - J and L Series - 26 models - 2 product groups	4-1
	Performance Summary - S Series - 27 models - 3 product groups	4-2
	J-Series Severe Duty Hydraulic Submersible Pumps - 15 models	4-3
	L-Series Severe Duty Hydraulic Submersible Pumps - 11 models	4-4
	S-Series Standard Duty Hydraulic Submersible Pumps - 9 models	4-5
	S-Series Rugged Duty Hydraulic Submersible Pumps - 9 models	4-6
	S-Series Severe Duty Hydraulic Submersible Pumps - 9 models	4-7
Section 7	Accessories	
	Discharge Tubing, Hose & Accessories	7-1
Section 8	Components & Replacement Parts	
	Electric Motors 1150 RPM.indd	8-1
	Electric Motors 1750 RPM.indd	8-2
	Electric Motors 3450 RPM.indd	8-3
	Electric Motors Explosion proof 1750 RPM.indd	8-4
	Pump control panels	8-5

Pumps - Dredges - Power Units - Custom or Standard
 Manufacturers of reliable Crisafulli products supported by superior service worldwide
 SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
 Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

SRS Crisafulli, Inc.

Product Catalogue - Section four
Electric Submersible Pumps



Submersible Electric Pumps

All-Electric Series, all RPMs - Performance Summary - Standard Models



Performance capabilities range from 40 to 2800 GPM depending on the size selected. 67 Models. Total Dynamic Heads (TDH) range from 35 feet to 270 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability range from 1/2 inches to 3 inches.

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Crisafulli Pump Series	RPM	Size	Flow Range (GPM)	Maximum Head (feet)	Solids Capacity Inches	Maximum HP
S-Series	1150	4"	200 - 850	45	2-1/4"	15
S-Series	1750	2"	40 - 150	40	1/2 - 2-1/4"	4
S-Series	1750	2.5"	75 - 340	40	1/2 - 2-1/4"	5
S-Series	1750	3"	100 - 520	60	1/2 - 2-1/4"	15
S-Series	1750	4"	200 - 1450	115	1/2 - 2-1/4"	50
S-Series	3450	2"	40 - 220	140	1/2"	10
S-Series	3450	2.5"	75 - 530	125	1/2"	25
J-Series	1150	2"	50 - 275	35	15/16"	4
J-Series	1150	2.5"	100 - 400	40	1-1/2"	6
J-Series	1150	3"	100 - 700	55	1-15/16"	12
J-Series	1150	4"	200 - 1400	65	2-3/4"	30
J-Series	1150	6"	400 - 2800	120	3	100
J-Series	1750	2"	50 - 275	90	15/16"	12
J-Series	1750	2.5"	100 - 600	100	1-1/2"	20
J-Series	1750	3"	200 - 1150	130	1-15/16"	40
J-Series	1750	4"	400 - 1900	150	2-3/4"	85
J-Series	1750	6"	500 - 2800	270	3"	200
H-Series	1750	3"	400 - 1000	120	1-15/16"	60

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

3-1 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Electric Submersible Pumps



Submersible Pumps

H-Series Electric 1750 RPM - Standard Models Standard Options



Performance capabilities range from 400 to 1000 GPM depending on the size selected. 5 Models. Total Dynamic Heads (TDH) range from 40 feet to 120 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability is 1-15/16 inches for all models.

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH - Feet	Solids passing capability	Impeller size - inches
3" H-Series 1750 RPM pump	SE036R-055-4	15	400	40	1-15/16"	9"
3" H-Series 1750 RPM pump	SE036R-025-4	25	600	60	1-15/16"	10"
3" H-Series 1750 RPM pump	SE036R-040-4	40	800	80	1-15/16"	11"
3" H-Series 1750 RPM pump	SE036R-050-4	50	900	100	1-15/16"	12"
3" H-Series 1750 RPM pump	SE036R-060-4	60	1,000	120	1-15/16"	13"

Standard Options - Description, Purpose, Benefits	SRSC Part Number
Case & Impeller from AR Steel BN 400 Hardness	
Case & Impeller from 316 Stainless Steel	
Electrical Control Panels	
Mercury Float Switches	
Tungsten Carbide Seals	
Additional Cable	

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Electric Submersible Pumps



Submersible Electric Pumps

J-Series Electric 1150 RPM - Standard Models Standard Options



Performance capabilities range from 125 to 1800 GPM depending on the size selected. 21 Models. Total Dynamic Heads (TDH) range from 10 feet to 100 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability range from 15/16 inches to 3 inches,

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH-Feet	Solids passing capability	Impeller size - inches
2" J-Series 1150 RPM pump	SE029R-002-6	2	125	10	15/16"	7"
2" J-Series 1150 RPM pump	SE029R-003-6	3	140	20	15/16"	8"
2" J-Series 1150 RPM pump	SE029R-004-6	4	140	30	15/16"	9"
2.5" J-Series 1150 RPM pump	SE259R-002-6	2	200	10	1-1/2"	7"
2.5" J-Series 1150 RPM pump	SE259R-003-6	3	175	20	1-1/2"	8"
2.5" J-Series 1150 RPM pump	SE259R-004-6	4	275	20	1-1/2"	9"
2.5" J-Series 1150 RPM pump	SE259R-005-6	5	275	30	1-1/2"	10"
3" J-Series 1150 RPM pump	SE039R-005-6	5	450	10	1-15/16"	9"
3" J-Series 1150 RPM pump	SE039R-005-6	7.5	450	20	1-15/16"	10"
3" J-Series 1150 RPM pump	SE039R-005-6	10	500	30	1-15/16"	11"
3" J-Series 1150 RPM pump	SE039R-005-6	12.5	675	40	1-15/16"	12"
4" J-Series 1150 RPM pump	SE049R-005-6	5	550	10	2-3/4"	9"
4" J-Series 1150 RPM pump	SE049R-010-6	10	600	20	2-3/4"	10"
4" J-Series 1150 RPM pump	SE049R-015-6	15	600	30	2-3/4"	11"
4" J-Series 1150 RPM pump	SE049R-020-6	20	800	40	2-3/4"	12"
4" J-Series 1150 RPM pump	SE049R-030-6	30	900	50	2-3/4"	13"
6" J-Series 1150 RPM pump	SE069R-060-6	60	1,800	60	3"	14"
6" J-Series 1150 RPM pump	SE069R-075-6	75	1,800	70	3"	14.5"
6" J-Series 1150 RPM pump	SE069R-075-6	75	1,800	80	3"	15"
6" J-Series 1150 RPM pump	SE069R-100-6	100	1,700	90	3"	15.5"
6" J-Series 1150 RPM pump	SE069R-100-6	100	1,600	100	3"	16.5"

Pumps - Dredges - Power Units - Custom or Standard

Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA

Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088

E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

3-3 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Electric Submersible Pumps



Submersible Electric Pumps

J-Series Electric 1750 RPM - Standard Models Standard Options



Performance capabilities range from 200 to 1900 GPM depending on the size selected. 21 Models. Total Dynamic Heads (TDH) range from 20 feet to 200 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability range from 15/16 inches to 3 inches.

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH - Feet	Solids passing capability	Impeller size - inches
2" J-Series 1750 RPM pump	SE029R-005-6	5	200	20	15/16"	7"
2" J-Series 1750 RPM pump	SE029R-007-6	7.5	225	40	15/16"	8"
2" J-Series 1750 RPM pump	SE029R-010-6	10	240	60	15/16"	9"
2.5" J-Series 1750 RPM pump	SE259R-007-6	7.5	275	20	1-1/2"	7"
2.5" J-Series 1750 RPM pump	SE259R-010-6	10	300	40	1-1/2"	8"
2.5" J-Series 1750 RPM pump	SE259R-015-6	15	275	60	1-1/2"	9"
2.5" J-Series 1750 RPM pump	SE259R-020-6	20	300	80	1-1/2"	10"
3" J-Series 1750 RPM pump	SE039R-015-6	15	450	10	1-15/16"	9"
3" J-Series 1750 RPM pump	SE039R-020-6	20	550	20	1-15/16"	10"
3" J-Series 1750 RPM pump	SE039R-030-6	30	600	30	1-15/16"	11"
3" J-Series 1750 RPM pump	SE039R-040-6	40	800	40	1-15/16"	12"
4" J-Series 1750 RPM pump	SE049R-020-6	20	1,000	20	2-3/4"	9"
4" J-Series 1750 RPM pump	SE049R-030-6	30	1,200	40	2-3/4"	10"
4" J-Series 1750 RPM pump	SE049R-050-6	50	1,200	60	2-3/4"	11"
4" J-Series 1750 RPM pump	SE049R-075-6	75	1,500	80	2-3/4"	12"
4" J-Series 1750 RPM pump	SE049R-085-6	85	1,700	100	2-3/4"	13"
6" J-Series 1750 RPM pump	SE069R-100-6	100	1,300	120	3"	12.5"
6" J-Series 1750 RPM pump	SE069R-125-6	125	1,500	140	3"	13.5"
6" J-Series 1750 RPM pump	SE069R-150-6	150	1,600	160	3"	14.5"
6" J-Series 1750 RPM pump	SE069R-175-6	175	1,750	180	3"	15.5"
6" J-Series 1750 RPM pump	SE069R-200-6	200	1,900	200	3"	16.5"

Pumps - Dredges - Power Units - Custom or Standard

Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA

Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088

E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

3-4 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Electric Submersible Pumps



Submersible Electric Pumps

S-Series Electric 1150 RPM - Standard Models Standard Options



Performance capabilities range from 500 to 600 GPM depending on the size selected. 3 Models. Total Dynamic Heads (TDH) range from 10 feet to 30 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability 2-1/4 inches for all models,

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH - Feet	Solids passing capability	Impeller size inches
4" S-Series 1,150 RPM pump	SE042R-005-6	5	500	10	2-1/4"	8"
4" S-Series 1,150 RPM pump	SE042R-007-6	10	575	20	2-1/4"	9"
4" S-Series 1,150 RPM pump	SE042R-010-6	15	600	30	2-1/4"	10"

Standard Options - Description, Purpose, Benefits	SRSC Part Number
Case & Impeller from AR Steel BN 400 Hardness	
Case & Impeller from 316 Stainless Steel	
Electrical Control Panels	
Mercury Float Switches	
Tungsten Carbide Seals	
Additional Cable	

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net

3-5 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Electric Submersible Pumps



Submersible Electric Pumps

S-Series Electric 1750 RPM - Standard Models Standard Options



Performance capabilities range from 70 to 900 GPM depending on the size selected. 16 Models. Total Dynamic Heads (TDH) range from 15 feet to 80 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability range from 1/2 inches to 2-1/4 inches,

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH - Feet	Solids passing capability	Impeller size nches
2" S-Series 1750 RPM pump	SE022R-001-4	1	70	15	1/12"	5"
2" S-Series 1750 RPM pump	SE022R-002-4	2	80	20	1/12"	5.5"
2" S-Series 1750 RPM pump	SE022R-003-4	3	90	25	1/12"	6"
2" S-Series 1750 RPM pump	SE022R-004-4	4	110	30	1/12"	6.5"
2.5" S-Series 1750 RPM pump	SE252R-003-4	3	200	15	1/2"	6"
2.5" S-Series 1750 RPM pump	SE252R-005-4	5	250	25	1/2"	7"
3" S-Series 1750 RPM pump	SE032R-005-4	5	200	20	1-3/4"	6"
3" S-Series 1750 RPM pump	SE032R-007-4	7.5	275	25	1-3/4"	6.5"
3" S-Series 1750 RPM pump	SE032R-010-4	10	325	30	1-3/4"	7"
3" S-Series 1750 RPM pump	SE032R-012-4	12.5	375	35	1-3/4"	7.5"
3" S-Series 1750 RPM pump	SE032R-015-4	15	375	35	1-3/4"	8"
4" S-Series 1750 RPM pump	SE042R-015-4	15	700	35	2-1/4"	8"
4" S-Series 1750 RPM pump	SE042R-020-4	20	800	40	2-1/4"	8.5"
4" S-Series 1750 RPM pump	SE042R-025-4	25	800	50	2-1/4"	9"
4" S-Series 1750 RPM pump	SE042R-040-4	40	900	60	2-1/4"	9.5"
4" S-Series 1750 RPM pump	SE049R-050-4	50	900	80	2-1/4"	10"

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

3-6 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue - Section Three
Hydraulic Submersible Pumps



Submersible Electric Pumps

S-Series Electric 3450 RPM - Standard Models Standard Options



Performance capabilities range from 100 to 350 GPM depending on the size selected. 6 Models. Total Dynamic Heads (TDH) range from 40 feet to 80 feet, depending on the pump size and electric motor selected. See below for GPM and TDH for each model listed. Solids passing capability is 1/2 inches for all models,

Description. SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 or BN 400 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

Size, Description, Performance Severe Duty Model	SRSC Part Number	Horse Power HP	Flow - GPM	TDH - Feet	Solids passing capability	Impeller size inches
2" S-Series 3450 RPM pump	SE022R-005-2	5	100	40	1/2"	5"
2" S-Series 3450 RPM pump	SE022R-010-2	10	120	60	1/2"	6"
2" S-Series 3450 RPM pump	SE022R-015-2	15	150	100	1/2"	6.5"
2" S-Series 3450 RPM pump	SE252R-010-2	10	300	40	1/2"	6"
2.5" S-Series 3450 RPM pump	SE252R-015-2	15	325	60	1/2"	6.5"
2.5" S-Series 3450 RPM pump	SE252R-025-2	25	350	80	1/2"	7"

Standard Options - Description, Purpose, Benefits	SRSC Part Number
Case & Impeller from AR Steel BN 400 Hardness	
Case & Impeller from 316 Stainless Steel	
Electrical Control Panels	
Mercury Float Switches	
Tungsten Carbide Seals	
Additional Cable	

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

3-7 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS J-Series and L-Series - Standard Models

Description. SRS Crisafulli J-Series and L-Series hydraulic powered pumps are portable, submersible pumps built for a variety of sludge & slurry applications. The pumps are offered only as Severe Duty. 15 models of the J-Series are offered in five sizes from 2" to 6". 11 models of the L-Series are offered in four sizes from 4" to 10". See below for performance capabilities of each pump - GPM and TDH. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).



Size, Description, Performance J-Series Severe Duty	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight - pounds
2" J-Series Severe Duty pump	200	50	HY029V-2505	HM2505	140
2" J-Series Severe Duty pump	200	65	HY029V-2507	HM2507	140
2.5" J-Series Severe Duty pump	280	20	HY252V-2505	HM2505	155
2.5" J-Series Severe Duty pump	300	40	HY252V-2507	HM2507	160
2.5" J-Series Severe Duty pump	270	60	HY252V-2510	HM2510	165
2.5" J-Series Severe Duty pump	300	80	HY252V-2515	HM2515	170
3" J-Series Severe Duty pump	650	50	HY039V-2510	HM2510	175
3" J-Series Severe Duty pump	650	60	HY039V-2515	HM2515	185
3" J-Series Severe Duty pump	750	90	HY039V-2520	HM2520	190
3" J-Series Severe Duty pump	840	100	HY039V-2525	HM2525	195
4" J-Series Severe Duty pump	800	60	HY049V-2525	HM2525	295
4" J-Series Severe Duty pump	1,200	70	HY049V-3730	HM3730	305
4" J-Series Severe Duty pump	1,020	60	HY049V-7620	HM7620	315
4" J-Series Severe Duty pump	1,500	120	HY049V-7625	HM7625	320
6" J-Series Severe Duty pump	1,800	80	HY069V-7630	HM7630	475

(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

Size, Description, Performance L-Series Severe Duty	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight - pounds
4" L-Series Severe Duty pump	840	10	HY045V-2520	HM2520	405
4" L-Series Severe Duty pump	880	20	HY045V-2525	HM2525	410
4" L-Series Severe Duty pump	760	30	HY045V-7620	HM7620	440
4" L-Series Severe Duty pump	940	30	HY045V-7625	HM7625	445
6" L-Series Severe Duty pump	1,300	20	HY065V-7620	HM7620	470
6" L-Series Severe Duty pump	1,750	25	HY065V-7625	HM7625	475
6" L-Series Severe Duty pump	2,150	30	HY065V-762020	HM762020	540
6" L-Series Severe Duty pump	2,300	40	HY065V-762025	HM762025	550
8" L-Series Severe Duty pump	3,000	20	HY085V-762020	HM762020	730
8" L-Series Severe Duty pump	3,100	30	HY085V-762525	HM762525	740
10" L-Series Severe Duty pump	3,800	25	HY105V-762525	HM762525	890

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net


SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS

Description. SRS Crisafulli S-Series hydraulic powered pumps are portable, submersible pumps built for a variety of sludge & slurry applications. The pumps are offered in three classes (Standard Duty, Rugged Duty, and Severe Duty) and with several sizes within each class. See below for performance capabilities of each pump - GPM and TDH. All pumps have suction stands and threaded discharges (other discharge finishes available upon request). **For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory**

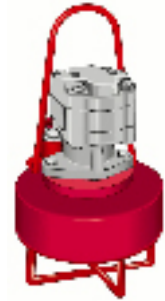

Size, Description, Performance	Flow GPM	TDH Feet	Part Number	Motor Number	Weight
2" S-Series Standard Duty pump	150	20	HY022S-2505	HM2505	75
2.5" S-Series Standard Duty pump	275	20	HY252S-2505	HM2505	78
3" S-Series Standard Duty pump	300	20	HY032S-2505	HM2505	110
3" S-Series Standard Duty pump	330	25	HY032S-2507	HM2507	120
3" S-Series Standard Duty pump	500	50	HY032S-2510	HM2510	120
4" S-Series Standard Duty pump	550	20	HY042S-2510	HM2510	145
4" S-Series Standard Duty pump	880	40	HY042S-2515	HM2515	148
4" S-Series Standard Duty pump	1020	60	HY042S-2520	HM2520	150
4" S-Series Standard Duty pump	680	80	HY042S-2525	HM2525	155
2" S-Series Rugged Duty pump	150	20	HY022R-2505	HM2505	75
2.5" S-Series Rugged Duty pump	275	20	HY252R-2505	HM2505	78
3" S-Series Rugged Duty pump	300	20	HY032R-2505	HM2505	110
3" S-Series Rugged Duty pump	330	25	HY032R-2507	HM2507	120
3" S-Series Rugged Duty pump	500	50	HY032R-2510	HM2510	120
4" S-Series Rugged Duty pump	550	20	HY042R-2510	HM2510	145
4" S-Series Rugged Duty pump	880	40	HY042R-2515	HM2515	148
4" S-Series Rugged Duty pump	1020	60	HY042R-2520	HM2520	150
4" S-Series Rugged Duty pump	680	80	HY042R-2525	HM2525	155
2" S-Series Severe Duty pump	150	20	HY022V-2505	HM2505	130
2.5" S-Series Severe Duty pump	275	20	HY252V-2505	HM2505	135
3" S-Series Severe Duty pump	300	20	HY032V-2505	HM2505	145
3" S-Series Severe Duty pump	330	25	HY032V-2507	HM2507	155
3" S-Series Severe Duty pump	500	50	HY032V-2510	HM2510	155
4" S-Series Severe Duty pump	550	20	HY042V-2510	HM2510	225
4" S-Series Severe Duty pump	880	40	HY042V-2515	HM2515	225


Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS J-Series Severe Duty - Standard Models Standard Options

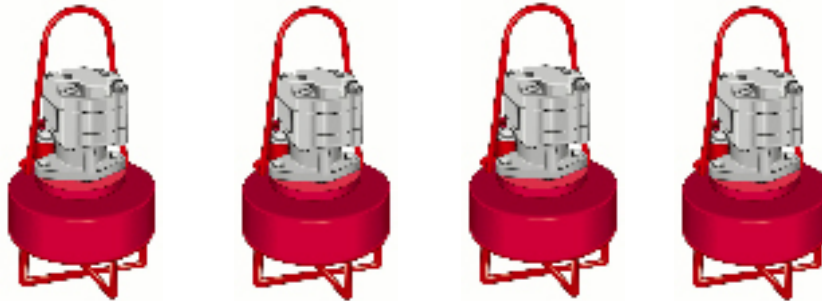

Performance capabilities range from 200 to 1800 GPM depending on the size selected. Total Dynamic Heads (TDH) range from 20 feet to 120 feet, depending on the pump size and hydraulic motor selected. See below for GPM and TDH for each model listed.

Description. SRS Crisafulli J series, hydraulic powered pumps are portable, submersible pumps built for a variety of sludge & slurry applications. The Severe Duty pumps are equipped with a precision machined drive shaft, an enclosed oil filled bearing column, mechanical shaft seals, abrasion resistant, heat treated alloy pump volute & semi-open impeller (Brinell 400 hardness), heavy-duty hydraulic motor, and gray epoxy paint. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).

Size, Description, Performance Severe Duty Model	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight - pounds
2" J-Series Severe Duty pump	200	50	HY029V-2505	HM2505	140
2" J-Series Severe Duty pump	200	65	HY029V-2507	HM2507	140
2.5" J-Series Severe Duty pump	280	20	HY252V-2505	HM2505	155
2.5" J-Series Severe Duty pump	300	40	HY252V-2507	HM2507	160
2.5" J-Series Severe Duty pump	270	60	HY252V-2510	HM2510	165
2.5" J-Series Severe Duty pump	300	80	HY252V-2515	HM2515	170
3" J-Series Severe Duty pump	650	50	HY039V-2510	HM2510	175
3" J-Series Severe Duty pump	650	60	HY039V-2515	HM2515	185
3" J-Series Severe Duty pump	750	90	HY039V-2520	HM2520	190
3" J-Series Severe Duty pump	840	100	HY039V-2525	HM2525	195
4" J-Series Severe Duty pump	800	60	HY049V-2525	HM2525	295
4" J-Series Severe Duty pump	1,200	70	HY049V-3730	HM3730	305
4" J-Series Severe Duty pump	1,020	60	HY049V-7620	HM7620	315
4" J-Series Severe Duty pump	1,500	120	HY049V-7625	HM7625	320
6" J-Series Severe Duty pump	1,800	80	HY069V-7630	HM7630	475

Standard Options - add prices shown below to S-Series Severe Duty Models

Description, Purpose, Benefits	SRSC Part Number	Unit Price
Stainless Steel Pump		Consult Factory
Hydraulic Slurry Gate		

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net


SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS

L-Series Severe Duty - Standard Models Standard Options

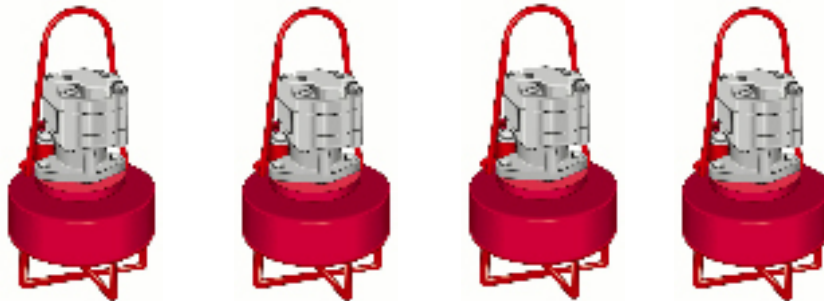

Performance capabilities range from 840 to 3800 GPM depending on the size selected. Total Dynamic Heads (TDH) range from 10 feet to 40 feet, depending on the pump size and hydraulic motor selected. See below for GPM and TDH for each model listed.

Description. SRS Crisafulli L Series, hydraulic powered pumps are portable, submersible pumps built for a variety of sludge & slurry applications. The Severe Duty pumps are equipped with a precision machined drive shaft, an enclosed oil filled bearing column, mechanical shaft seals, abrasion resistant, heat treated alloy pump volute & semi-open impeller (Brinell 400 hardness), heavy-duty hydraulic gear motor, and gray epoxy paint. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).

Size, Description, Performance L-Series Severe Duty Models	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight pounds
4" L-Series Severe Duty pump	840	10	HY045V-2520	HM2520	405
4" L-Series Severe Duty pump	880	20	HY045V-2525	HM2525	410
4" L-Series Severe Duty pump	760	30	HY045V-7620	HM7620	440
4" L-Series Severe Duty pump	940	30	HY045V-7625	HM7625	445
6" L-Series Severe Duty pump	1,300	20	HY065V-7620	HM7620	470
6" L-Series Severe Duty pump	1,750	25	HY065V-7625	HM7625	475
6" L-Series Severe Duty pump	2,150	30	HY065V-762020	HM762020	540
6" L-Series Severe Duty pump	2,300	40	HY065V-762025	HM762025	550
8" L-Series Severe Duty pump	3,000	20	HY085V-762020	HM762020	730
8" L-Series Severe Duty pump	3,100	30	HY085V-762525	HM762525	740
10" L-Series Severe Duty pump	3,800	25	HY105V-762525	HM762525	890

Standard Options

Description, Purpose, Benefits	SRSC Part Numbers
Hydraulic Slurry Gate (price is same for each size pump). "Slurry Gate" is opened to agitate and slurry the pond. Solids and liquids are drawn into the pump, blended and injected through the slurry gate into unmixed material. After a period of time, depending on material thickness, the entire pit will be slurried and the operator can close the slurry gate hydraulically from the bank. The pump will then pump the material out at high volume. No separate agitator or mixer pumps are needed. One SRS Crisafulli pump does it all.	SRSC Part Number plus - SG
Diesel/Hydraulic Power Units	
Electric/Hydraulic Power Units	
Hydraulic Hose & Fittings	
WARNING - During pump operation the return hydraulic hose pressure should not exceed 100 PSI. Some control valves may cause peak over pressuring during shutdown. If the return hydraulic hose pressure may exceed 100 PSI, then consult the factory.	

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net


4-4 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS S-Series Standard Duty - Standard Models Standard Options

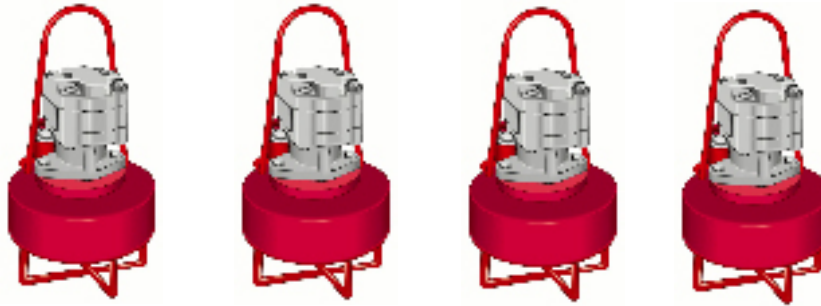

Performance capabilities range from 150 to 1020 GPM depending on the size selected. Total Dynamic Heads (TDH) range from 20 feet to 80 feet, depending on the pump size and hydraulic motor selected. See below for GPM and TDH for each model listed.

Description. SRS Crisafulli S-Series, hydraulic powered pumps are portable, submersible pumps, available in three styles. The Standard Duty pumps are equipped with a Nitrile drive shaft seal, A36 mild carbon steel pump volute and impeller, and heavy-duty hydraulic gear motor. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).

Size, Description, Performance S-Series Standard Duty Model	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight pounds
2" S-Series Standard Duty pump	150	20	HY022S-2505	HM2505	75
2.5" S-Series Standard Duty pump	275	20	HY252S-2505	HM2505	78
3" S-Series Standard Duty pump	300	20	HY032S-2505	HM2505	110
3" S-Series Standard Duty pump	330	25	HY032S-2507	HM2507	120
3" S-Series Standard Duty pump	500	50	HY032S-2510	HM2510	120
4" S-Series Standard Duty pump	550	20	HY042S-2510	HM2510	145
4" S-Series Standard Duty pump	880	40	HY042S-2515	HM2515	148
4" S-Series Standard Duty pump	1,020	60	HY042S-2520	HM2520	150
4" S-Series Standard Duty pump	680	80	HY042S-2525	HM2525	155

Standard Options - add prices shown below to S-Series Standard Duty Models

Description, Purpose, Benefits	SRSC Part Number	Unit Price
Stainless Steel Pump		Consult Factory
Hydraulic Slurry Gate		
Diesel/Hydraulic Power Units		
Electric/Hydraulic Power Units		
Hydraulic Hose & Fittings		

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net


4-5 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS S-Series Rugged Duty - Standard Models Standard Options

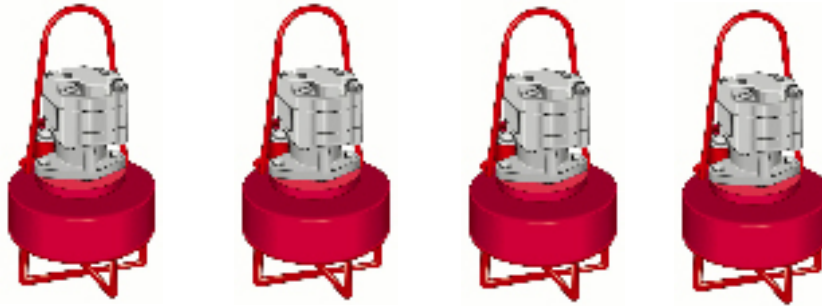

Performance capabilities range from 150 to 1020 GPM depending on the size selected. Total Dynamic Heads (TDH) range from 20 feet to 80 feet, depending on the pump size and hydraulic motor selected. See below for GPM and TDH for each model listed.

Description. SRS Crisafulli S-Series, hydraulic powered pumps are portable, submersible pumps, available in three styles. The Rugged Duty pumps are equipped with tungsten carbide/silicon carbide mechanical shaft seal, abrasion resistant, heat-treated alloy pump volute & impeller (Brinell 400 hardness), heavy-duty hydraulic gear motor, and gray epoxy paint. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).

Size, Description, Performance S-Series Rugged Duty Models	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight pounds
2" S-Series Rugged Duty pump	150	20	HY022R-2505	HM2505	75
2.5" S-Series Rugged Duty pump	275	20	HY252R-2505	HM2505	78
3" S-Series Rugged Duty pump	300	20	HY032R-2505	HM2505	110
3" S-Series Rugged Duty pump	330	25	HY032R-2507	HM2507	120
3" S-Series Rugged Duty pump	500	50	HY032R-2510	HM2510	120
4" S-Series Rugged Duty pump	550	20	HY042R-2510	HM2510	145
4" S-Series Rugged Duty pump	880	40	HY042R-2515	HM2515	148
4" S-Series Rugged Duty pump	1,020	60	HY042R-2520	HM2520	150
4" S-Series Rugged Duty pump	680	80	HY042R-2525	HM2525	155

Standard Options - add prices shown below to S-Series Rugged Duty Models

Description, Purpose, Benefits	SRSC Part Number
Stainless Steel Pump	
Hydraulic Slurry Gate	
Diesel/Hydraulic Power Units	
Electric/Hydraulic Power Units	
Hydraulic Hose & Fittings	


Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Four
Hydraulic Submersible Pumps



HYDRAULIC POWERED SUBMERSIBLE PUMPS S-Series Severe Duty - Standard Models Standard Options

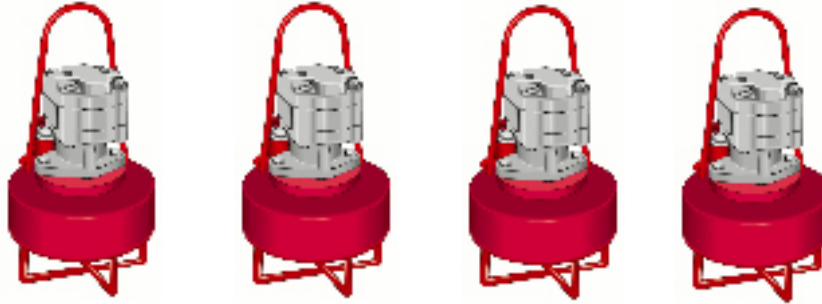

Performance capabilities range from 150 to 1020 GPM depending on the size selected. Total Dynamic Heads (TDH) range from 20 feet to 80 feet, depending on the pump size and hydraulic motor selected. See below for GPM and TDH for each model listed.

Description. SRS Crisafulli S-Series, hydraulic powered pumps are portable, submersible pumps, available in three styles. The Severe Duty pumps feature dual mechanical seals and an oil-filled bearing frame which will isolate the motor from pumpage. All pumps have suction stands and threaded discharges (other discharge finishes available upon request).

Size, Description, Performance S-Series Severe Duty Model	Flow GPM	TDH Feet	SRSC Part Number	Motor Part Number	Est. weight pounds
2" S-Series Severe Duty pump	150	20	HY022V-2505	HM2505	130
2.5" S-Series Severe Duty pump	275	20	HY252V-2505	HM2505	135
3" S-Series Severe Duty pump	300	20	HY032V-2505	HM2505	145
3" S-Series Severe Duty pump	330	25	HY032V-2507	HM2507	155
3" S-Series Severe Duty pump	500	50	HY032V-2510	HM2510	155
4" S-Series Severe Duty pump	550	20	HY042V-2510	HM2510	225
4" S-Series Severe Duty pump	880	40	HY042V-2515	HM2515	225
4" S-Series Severe Duty pump	1,020	60	HY042V-2520	HM2520	250
4" S-Series Severe Duty pump	680	80	HY042V-2525	HM2525	255

Standard Options - add prices shown below to S-Series Severe Duty Models	
Description, Purpose, Benefits	SRSC Part Number
Stainless Steel Pump	
Hydraulic Slurry Gate	
Diesel/Hydraulic Power Units	
Electric/Hydraulic Power Units	
Hydraulic Hose & Fittings	

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafullipumps.com www.dredge.net

4-7 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.


Product Catalogue With Prices - Section Seven
Tubing, Hose, & Accessorie



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

DISCHARGE TUBING, HOSE & ACCESSORIES

SRS Crisafulli offers three types of Discharge Tubing and Hose with various pressure ratings:

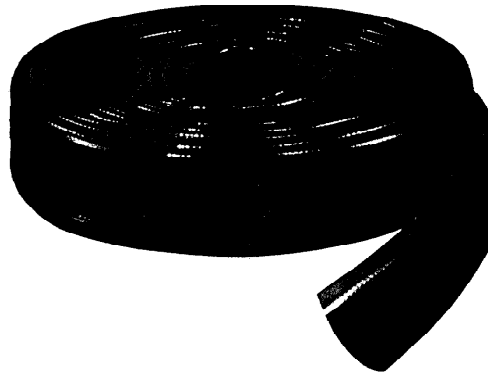

Description. SRS Crisafulli Industrial Tubing is manufactured in 50 foot lengths with tough nylon reinforcing and butyl rubber covers both inside and outside. The industrial tubing has ring & cuff coupling ends and a galvanized steel ring (hose clamp for attaching to the pump is not included) to interlock with additional tubing to form longer hose lengths.

Nominal Diameter Inches	Working Pressure PSI	SRSC Part Number	Unit Price (a)	Estimated Weight Pounds
6	145	1001792		67
8	109	1000237		88
10	87	1001675		110
12	73	1000127		133
16	55	1000211		177

(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

Replacement Steel Ring			Heavy Duty Clamps		
Nominal Diameter Inches	SRSC Part Number	Unit Price	Nominal Diameter Inches	SRSC Part Number	Unit Price
6	TBR06	\$66	6	1001791	\$65
8	TBR08	\$66	8	1000238	\$65
10	TBR10	\$66	10	1001676	\$65
12	TBR12	\$68	12	1000128	\$65
16	TBR16	\$68	16	1000211	\$65

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net
7-1 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.


Product Catalogue Without Prices - Section Eight
Electric Motors



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

ELECTRIC MOTORS

Description. SRS Crisafulli Electric Motors are Totally Enclosed Fan Cooled (TEFC), energy efficient, squirrel cage, A.C. induction type motors. The electric motors are 60 cycle, with 1.15 service factor, class B temperature rise, class F insulation, and steel or cast iron frames. The motors may be coated with special paints and coatings as the application requires. Open Drip Proof motors are available upon request (consult factory for pricing).

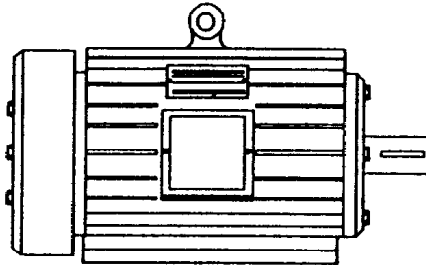

SINGLE PHASE 1,150 RPM, 115/230 VOLT

HORSE POWER (HP)	SRSC Part Number	Unit Price (a)	Est. weight - pounds
1	EM0011150ST		74
1.5	EM00151150ST		78
2	EM0021150ST		114
3	EM0031150ST		132

THREE PHASE 1,150 RPM, 230/460 VOLT

HORSE POWER (HP)	SRSC Part Number	Unit Price (a)	Est. weight - pounds
1	EM0011150TT		59
1.5	EM00151150TT		68
2	EM0021150TT		98
3	EM0031150TT		153
5	EM0051150TT		178
7.5	EM00751150TT		247
10	EM0101150TT		121
15	EM0151150TT		162
20	EM0201150TT		269
25	EM0251150TT		260
30	EM0301150TT		382
40	EM0401150TT		746
50	EM0501150TT		772
60	EM0601150TT		1051
75	EM0751150TT		1093

(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulliPumps.com www.dredge.net

8-1 SRS Crisafulli, Inc. - Product Catalogue

SRS Crisafulli, Inc.

Product Catalogue Without Prices - Section Eight
Electric Motors



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

ELECTRIC MOTORS

Description. SRS Crisafulli Electric Motors are Totally Enclosed Fan Cooled (TEFC), energy efficient, squirrel cage, A.C. induction type motors. The electric motors are 60 cycle, with 1.15 service factor, class B temperature rise, class F insulation, and steel or cast iron frames. The motors may be coated with special paints and coatings as the application requires. Open Drip Proof motors are available upon request (consult factory for pricing).

SINGLE PHASE 1,750 RPM, 115/230 VOLT

HORSE POWER (HP)	SRSC Part Number	Unit Price (a)	Est. weight - pounds
1	EM0011800ST		41
1.5	EM00151800ST		50
2	EM0021800ST		74
3	EM0031800ST		79
5	EM0051800ST		118
7.5	EM00751800ST		134
10	EM0101800ST		161
15	EM0151800ST		322
THREE PHASE 1,750 RPM, 230/460 VOLT			
1	EM0011800TT		36
1.5	EM0015800TT		41
2	EM0021800TT		60
3	EM0031800TT		94
5	EM0051800TT		109
7.5	EM00751800TT		175
10	EM0101800TT		187
15	EM1001712TT		244
20	EM1002773TT		269
25	EM1001160TT		396
30	EM1000702TT		433
40	EM1001282TT		517
50	EM1000569TT		579
60	EM1000453TT		747
75	EM1000702TT		833
100	EM1001685TT		1,187
125	EM1002725TT		1,540
150	EM1000571TT		1,740
200	EM2001800TT		1,937
250	EM2501800TT		2,120
300	EM3001800TT		2,575
350	EM3501800TT		2,680
400	EM4001800TT		2,812

(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.crisafulliPumps.com www.dredge.net

SRS Crisafulli, Inc.


Product Catalogue Without Prices - Section Eight
Electric Motors



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

ELECTRIC MOTORS

Description. SRS Crisafulli Electric Motors are Totally Enclosed Fan Cooled (TEFC), energy efficient, squirrel cage, A.C. induction type motors. The electric motors are 60 cycle, with 1.15 service factor, class B temperature rise, class F insulation, and steel or cast iron frames. The motors may be coated with special paints and coatings as the application requires. Open Drip Proof motors are available upon request (consult factory for pricing).

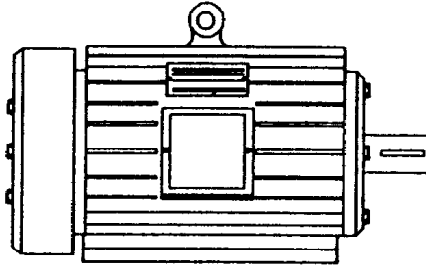

SINGLE PHASE 3,450 RPM, 115/230 VOLT

HORSE POWER (HP)	SRSC Part Number	Unit Price (a)	Est. weight - pounds
1	EM0013450ST		40
1.5	EM00153450ST		45
2	EM0023450ST		51
3	EM0033450ST		74
5	EM0053450ST		92
7.5	EM00753450ST		121
10	EM0103450ST		148

THREE PHASE 3,450 RPM, 230/460 VOLT

1	EM0013450TT		33
1.5	EM00153450TT		41
2	EM0023450TT		49
3	EM0033450TT		52
5	EM0053450TT		79
7.5	EM00753450TT		89
10	EM0103450TT		121
15	EM0153450TT		162
20	EM0203450TT		269
25	EM0253450TT		260
30	EM0303450TT		382

(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.CrisafulliPumps.com www.dredge.net
SRS Crisafulli, Inc. - Price Book

SRS Crisafulli, Inc.


Product Catalogue Without Prices - Section Eight
Parts



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

ELECTRIC MOTORS

Description. SRS Crisafulli Electric Motors are Explosion Proof (Class1, Group D) energy efficient, squirrel cage, A.C. induction type motors. The electric motors are 60 cycle, with 1.0 service factor, class B temperature rise, class F insulation, and steel or cast iron frames. The motors may be coated with special paints and coatings as the application requires.

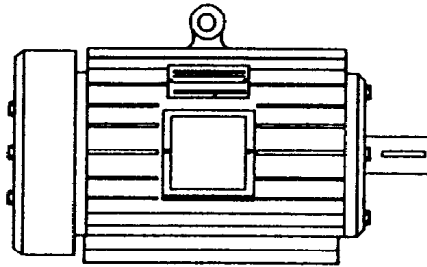

EXPLOSION PROOF, 1,750 RPM, 230/460 VOLT

HORSE POWER (HP)	SRSC Part Number	Unit Price (a)	Est. weight - pounds
5	EM0051800TE		148
7.5	EM007511800TE		212
10	EM0101800TE		227
15	EM0151800TE		376
20	EM0201800TE		390
25	EM0251800TE		510
30	EM0301800TE		520
40	EM0401800TE		710
50	EM0501800TE		750
60	EM0601800TE		975
75	EM0751800TE		1,000
100	EM1001800TE		1,335
125	EM1251800TE		1,350
150	EM1501800TE		1,450
200	EM2001800TE		1,975
250	EM2501800TE		2,780
OPTIONS			
Class II, Group F & G, Division 1 and 2.	Consult Factory For Current Pricing		
(a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory			

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide
SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA
Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088
E-mail: srsc@crisafulli.com - www.CrisafulliPumps.com www.dredge.net

SRS Crisafulli, Inc.

Product Catalogue Without Prices- Section Eight Pump Control Panels



Prices effective September 30, 2005
Prices subject to change without notice
All prices FOB Glendive, MT 59330 USA

PUMP CONTROL PANELS Across-The-Line-Starters

Description. SRS Crisafulli Across-the-Line-Pump Control Panels include NEMA 3R steel enclosures with a main circuit breaker (with lockable handle), magnetic contactor, adjustable thermal overload protection, reset pushbutton, fused control circuit (above 20 HP), hand-off-auto selector switch with start pushbutton, and terminal block for connection of optional remote control device (i.e., level or pressure switch).

SINGLE PHASE - 230 VOLT

HORSE POWER (HP)	SRSC Part Number	Approximate Size -inches	Unit Price (a)	Est. weight - pounds
3	PX21-003	24x11x7		35
5	PX21-005	24x11x7		35
7.5	1002253	24x11x7		38
10	PX21-010	24x11x7		40

THREE PHASE- 230 VOLT - (a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

3	PX23-003	24x11x7		35
5	PX23-005	24x11x7		35
7.5	PX23-007	24x11x7		38
10	PX23-010	24x11x7		38
15	PX23-015	24x11x7		40
20	PX23-020	24x15x7		52
25	1002305	24x11x7		52
30	PX23-030	32x20x11		102
40	PX23-040	32x20x11		105
50	PX23-050	40x24x11		125

THREE PHASE- 460 VOLT - (a) For pricing consult Dealer, Rep, Factory Regional Sales Manager, or Factory

5	PX43-003	24x11x7		40
7.5	PX43-007	24x11x7		40
10	PX43-010	24x11x7		40
15	1001721	24x11x7		40
20	1000143	24x15x7		52
25	PX43-025	24x15x7		52
30	1000459	24x15x7		55
40	1003974	24x15x7		55
50	1001793	24x15x7		55
60	1004189	30x25x7		80
75	1004190	40x24x11		127
100	PX43-010	40x24x11		133
125		40x24x11		140
150	1004234	40x24x11		150
200	PX43-200	24x39x10		180
250	PX43-250	31x48x10		210
300	PX43-300	31x48x10		450
400	PX43-400	31x48x10		450

Options. Multi-conductor Type SO (or W) Power Cable

Consult Factory For Current Pricing

NOTE: On Crisafulli™ Electric Powered Pumps we recommend using reduced voltage starters on applications using 100 HP or greater and requiring more than 1 start/stop cycle every 6 hours.

Pumps - Dredges - Power Units - Custom or Standard
Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA

Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088

E-mail: srsc@crisafulli.com - www.CrisafulliPumps.com www.dredge.net

8-5 SRS Crisafulli, Inc. - Product Catalogue